



Differential Phase Shift Circulator

9000 ~ 10000 MHz

ADC950DWR(1000)


Features

- Low insertion loss
- Robust design for shock and vibration
- RoHS Compliant

Electrical Characteristics

Parameter	Units	Specifications
Frequency	GHz	9.0 ~ 10.0
Insertion Loss	dB Max.	0.35
Isolation	dB Min.	18
VSWR	Max.	1.22 : 1
Temperature	°C	- 30 ~ +75
Forward Power	W Max.	200
Waveguide Package	-	WR90

Mechanical Dimensions

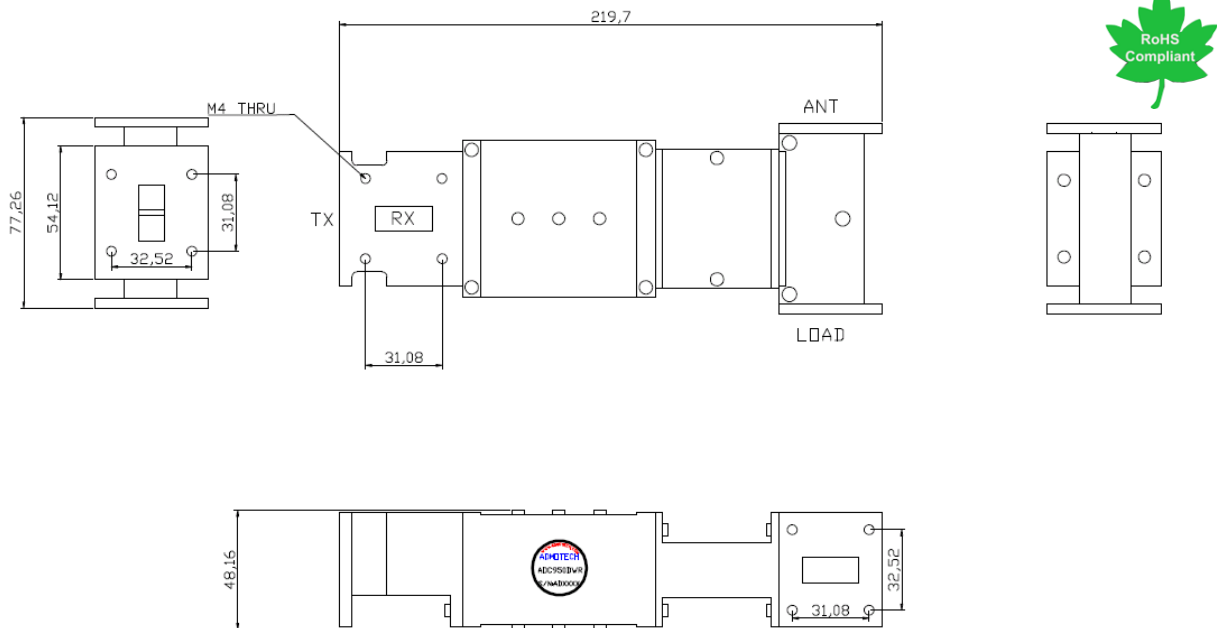

If you do not find appropriate frequency range, Please contact with sales@admotech.com