

### Features

- Cavity Duplexer for LTE Band 21.
- Very compact size and low weight. (86 x 123 x 45 mm)
- 1.5 dB typical Insertion loss @ room temp.
- 90 dB typical DL to UL Isolation.



### Electrical Specifications

#### Duplexer DL Path (DL → ANT)

PARAMETER	SPECIFICATION	COMMENT
Frequency Range	1,495.9 MHz ~ 1,510.9 MHz	BW = 15 MHz
Insertion Loss	2.0 dB Max.	Over whole temp. range
Pass Band Ripple	1.0 dB Max.	
Return Loss	18.0 dB Min.	
Isolation	80.0 dB Min.	@ 1,447.9 MHz ~ 1,462.9 MHz
Max Power	100 Watts	CW
Impedance	50 Ω	

#### Duplexer UL Path (ANT → UL)

PARAMETER	SPECIFICATION	COMMENT
Frequency Range	1,447.9 MHz ~ 1,462.9 MHz	BW = 15 MHz
Insertion Loss	2.0 dB Max.	Over whole temp. range
Pass Band Ripple	1.0 dB Max.	
Return Loss	18.0 dB Min.	
Isolation	80.0 dB Min.	@ 1,495.9 MHz ~ 1,510.9 MHz
Impedance	50 Ω	

### Environmental


Operating temperature range      -20 to +70 °C

### Mechanical

Dimensions<sup>1)</sup>                              86 x 123 x 45 mm


1) Excluding connectors, and mounting bracket extension

## Outline Drawing

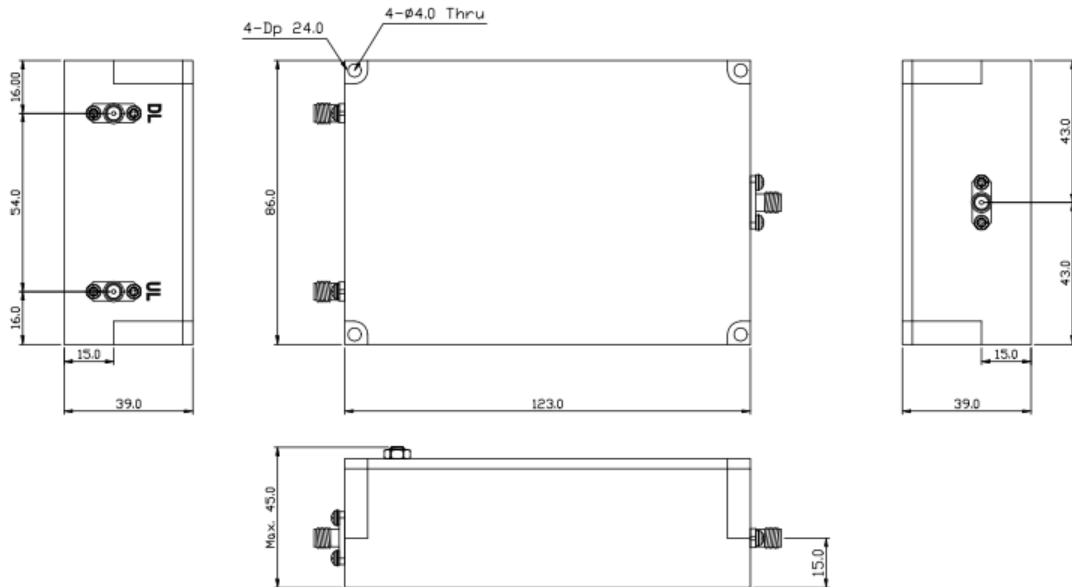


Units : mm, Tolerance : +/- 0.2 mm

## Typical Response

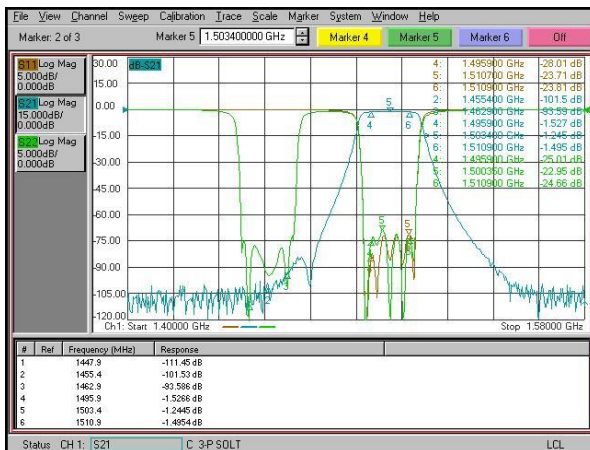

Duplexer DL path Transmission

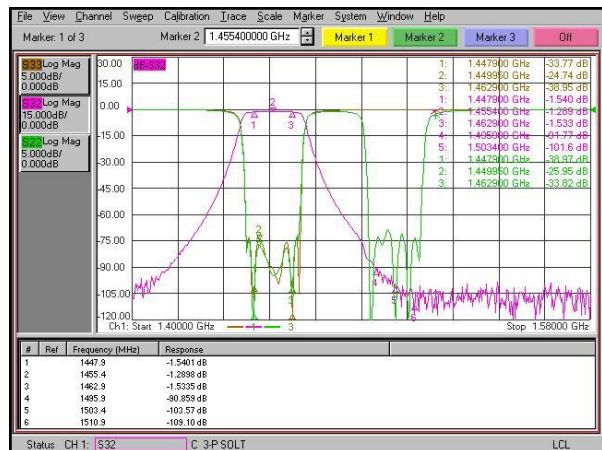

Duplexer UL path Transmission