

Features

- Cavity Duplexer for LTE Band 25.
- Very compact size and low weight. (100 x 100 x 30 mm)
- 1.8 dB typical Insertion loss @ room temp.
- 83 dB typical DL to UL Isolation.



Electrical Specifications

Duplexer DL Path (DL → ANT)

PARAMETER	SPECIFICATION	COMMENT
Frequency Range	1,930 MHz ~ 1,995 MHz	BW = 65 MHz
Insertion Loss	2.0 dB Max.	Over whole temp. range
Pass Band Ripple	1.3 dB Max.	
Return Loss	18.0 dB Min.	
Isolation	80.0 dB Min.	@ 1,850 MHz ~ 1,915 MHz
Max Power	100 Watts	CW
Impedance	50 Ω	

Duplexer UL Path (ANT → UL)

PARAMETER	SPECIFICATION	COMMENT
Frequency Range	1,850 MHz ~ 1,915 MHz	BW = 65 MHz
Insertion Loss	2.0 dB Max.	Over whole temp. range
Pass Band Ripple	1.3 dB Max.	
Return Loss	18.0 dB Min.	
Isolation	80.0 dB Min.	@ 1,930 MHz ~ 1,995 MHz
Impedance	50 Ω	

Environmental


Operating temperature range -20 to +70 °C

Mechanical

Dimensions¹⁾ 100 x 100 x 30 mm


1) Excluding connectors, and mounting bracket extension

Outline Drawing

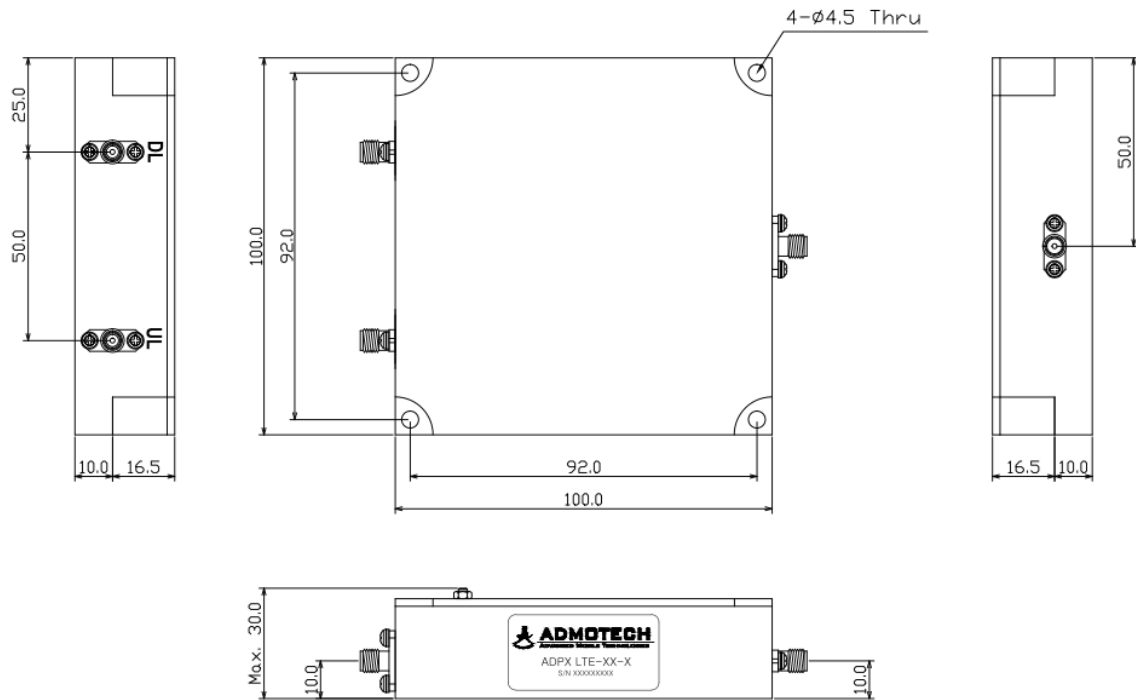


Units : mm, Tolerance : +/- 0.2 mm

Typical Response

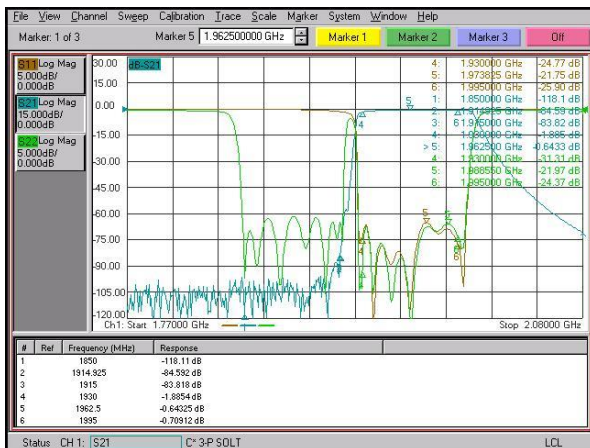

Duplexer DL path Transmission

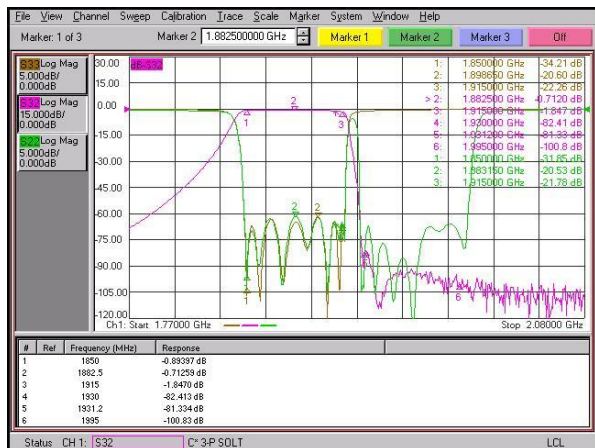

Duplexer UL path Transmission

ADMOTECH 37-10, Techno 1-ro, Yuseong-gu, Daejeon 34015, South Korea

Phone :+82-42-936-1353 Fax :+82-42-936-1350

<http://www.admotech.com> • sales@admotech.com

- 2/2 -