

### Features

- Cavity Duplexer for LTE Band 66.
- Very compact size and low weight. (100 x 100 x 30 mm)
- DL 0.9 dB / UL 1.1 dB typical Insertion loss @ room temp.
- 90 dB typical DL to UL Isolation.



### Electrical Specifications

#### Duplexer DL Path (DL → ANT)

PARAMETER	SPECIFICATION	COMMENT
Frequency Range	2,110 MHz ~ 2,200 MHz	BW = 90 MHz
Insertion Loss	1.3 dB Max.	Over whole temp. range
Pass Band Ripple	0.7 dB Max.	
Return Loss	18.0 dB Min.	
Isolation	80.0 dB Min.	@ 1,710 MHz ~ 1,780 MHz
Max Power	100 Watts	CW
Impedance	50 Ω	

#### Duplexer UL Path (ANT → UL)

PARAMETER	SPECIFICATION	COMMENT
Frequency Range	1,710 MHz ~ 1,780 MHz	BW = 70 MHz
Insertion Loss	1.5 dB Max.	Over whole temp. range
Pass Band Ripple	0.8 dB Max.	
Return Loss	18.0 dB Min.	
Isolation	80.0 dB Min.	@ 2,110 MHz ~ 2,200 MHz
Impedance	50 Ω	

### Environmental


Operating temperature range      -20 to +70 °C

### Mechanical

Dimensions<sup>1)</sup>                              100 x 100 x 30 mm


1) Excluding connectors, and mounting bracket extension

## Outline Drawing

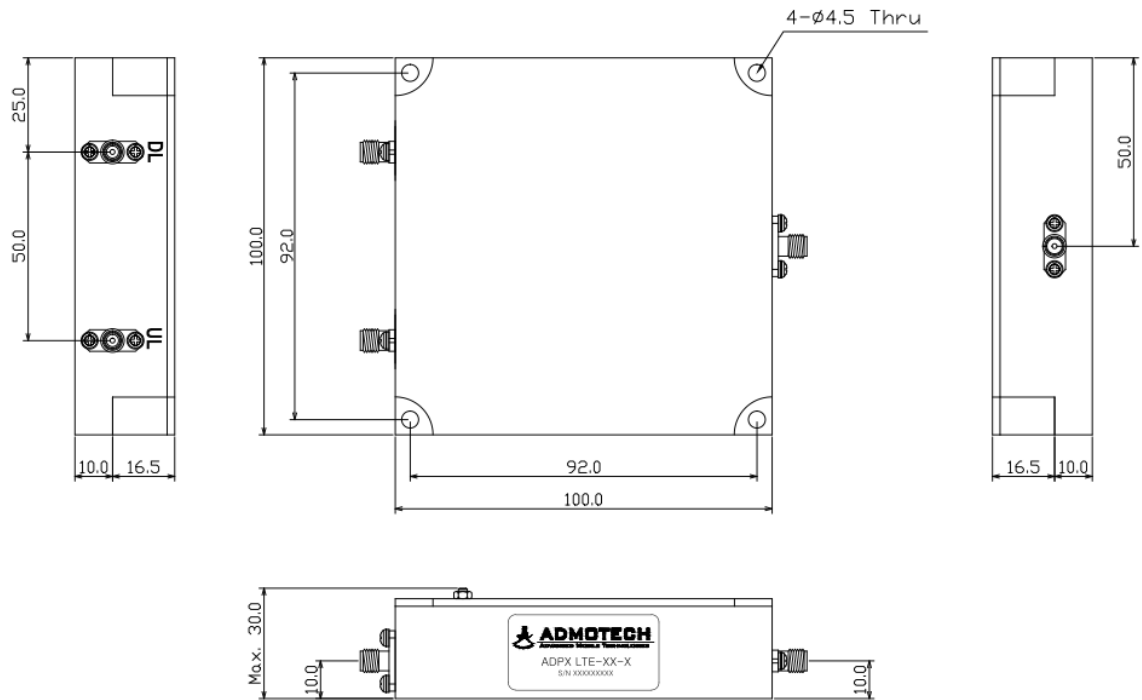


Units : mm, Tolerance : +/- 0.2 mm

## Typical Response

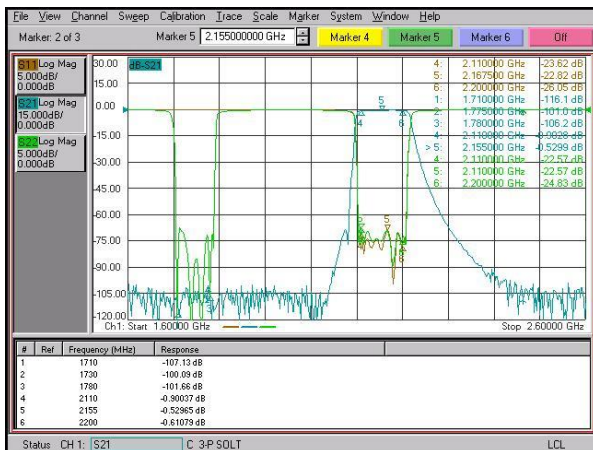

Duplexer DL path Transmission

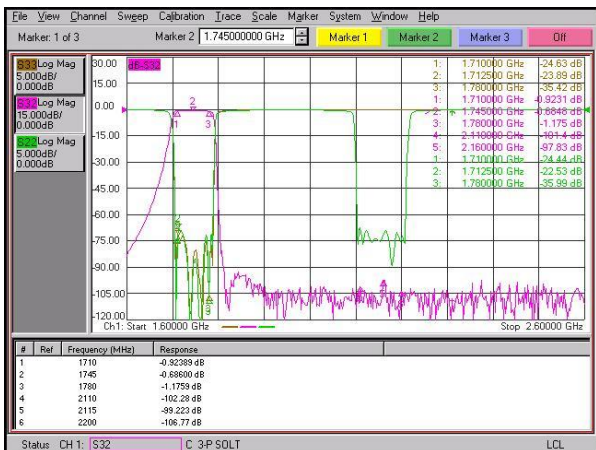

Duplexer UL path Transmission